



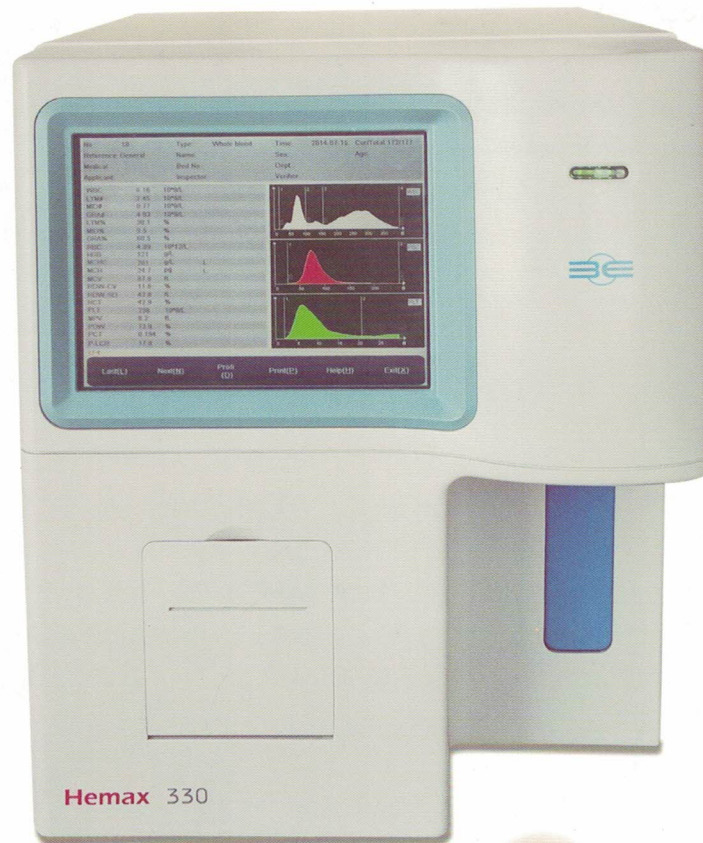

Hemax 330
HGW9X 330

Auto Hematology Analyzer



20 Parameters & 3 Histograms
60 samples per hour
9.8μL samples volume
Operation with touch screen

Features

- 20 Parameters+3 Histograms for WBC,RBC and PLT
- 3-Part differentiation of WBC
- 3 Counting mode: whole blood, Pre-diluted Blood, Peripheral Blood
- LCD display with Touch Screen and Mouse Operation
- Throughput: 60 samples per hour
- Built-in thermal printer, optional external printer
- External AC adapter avoids electronic noises, enhancing accuracy
- Up to 50,000 sample results(including histograms) stored
- Language : English ,French ,Spanish



Hemax 330

Technical Specifications

Parameters:

WBC, RBC, HGB, MCHC, MCH, MCV, HCT, RDW-CV, RDW-SD, PLT, PDW, MPV, PCT, P-LCR, LYM#, LYM%, MID#, MID%, GRA#, GRA%
3 Histograms for WBC, RBC, PLT

Throughput: Up to 60 samples per hour

Carryover: WBC/RBC/HGB < 0.5%, PLT < 1.0%

Accuracy (CV):

- WBC ≤ 2.0%
- RBC ≤ 1.5%
- HGB ≤ 1.5%
- MCV ≤ 0.4%
- PLT ≤ 4%

Principle: Electrical resistance for counting WBC, RBC and PLT

Sample Volume: Whole Blood 9.8μL, Pre-diluted Blood 20μL, Peripheral Blood 9.8μL

Operating Environment: 15°C-35°C, Humidity ≤ 80%

Alarms: Error Messages


Input/Output: RS-232, USB, LAN, Keyboard and Mouse Interface

Printout: Thermal printer, 55mm width paper, Various printout formats, External printer optional

Power Requirement: a.c.110V-220V, 50/60Hz

Dimension: 478mm(L)X330mm(W)×395mm(H)

Weight: 23kg

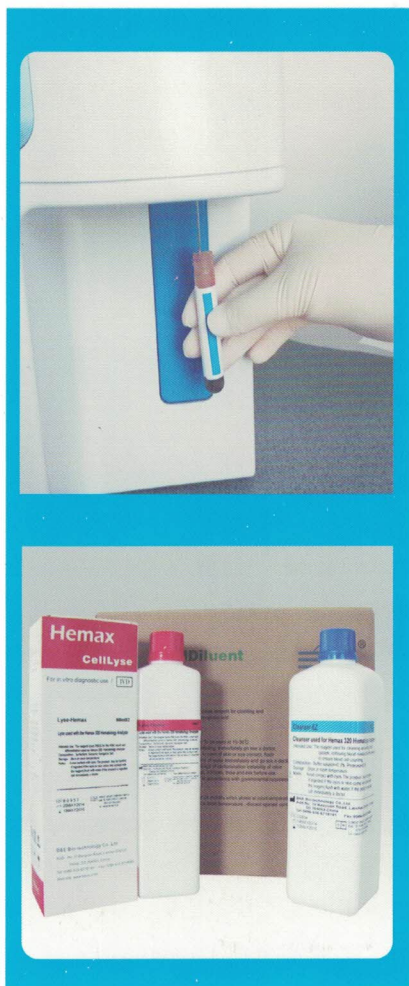

Authorized by : B&E Diagnostics Inc.
804 Thornadale Ave. Bensenville IL 60106 USA
Tel :+ 1 630 974 5159 Fax :+ 1 630 974 5160
Manufactured by :B&E Bio-Technology Co.,Ltd.
No.10 Baoyuan Road, Yantai, China 264003
Tel :+ 86 535 6718181 Fax :+ 86 535 6718080
Email:info@besic.com Website: www.besic.com



Your Local Distributor is: